

### Dual Check Valves


Dual checks provide protection to the potable water supply from contamination in low hazard applications like meter connections on domestic properties.

#### SPECIFICATIONS

- Body: Bronze
- Check Springs: Stainless steel
- Minimum Working Pressure 220kPa
- Maximum Working Pressure 1200kPa
- Compact and lightweight
- Corrosion resistant
- Independently operating check valves
- Operating temperature range of 1°C to 60°C
- Suitable for vertical and horizontal installations
- Approved to AS 2845-1
- \* Low Hazard Rating



AS2845.1  
Lic 1335

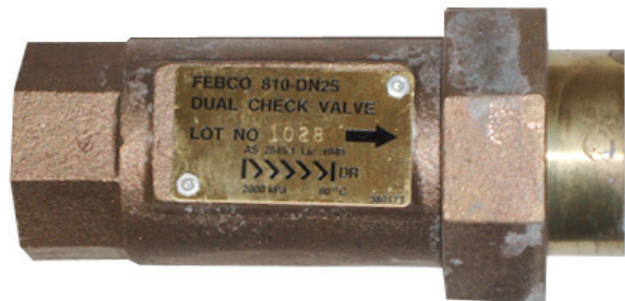

810 25DC

MODELS	CODE
20mm Dual Check F x F 20mm	81020DC
25mm Dual Check F x F 25mm	81025DC