




Lawn & Garden

Pressure Regulator

(U.S. Patent No. 5881757)

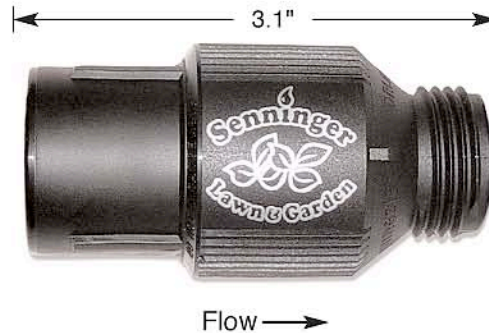

APPLICATION

Ideal for pressure regulation of drip or other low-volume irrigation systems connected to outdoor hose bibb faucets.

FEATURES

- 3/4" (hose thread) female inlet
- 3/4" (hose thread) male outlet
- Available in 10, 15, 20, 25, 30, 35 and 40 psi models
- Maintains a constant preset outlet pressure at varying inlet pressures (See regulation chart, side 2)
- Flow range from 0.1 to 7.0 gpm
- Can be used with 6 to 420 one-gph emitters (consult dealer for correct number of emitters based on pipe length and size)
- Prevents wasteful misting when using small nozzles
- Tamper-proof housing
- No adjustments ever needed
- 100% water tested for regulating accuracy
- Strong, durable construction of high-impact engineering-grade thermoplastics with stainless steel compression spring.
- Two-year warranty on materials, workmanship & performance

CAUTION: The Senninger Lawn & Garden Pressure regulator must always be installed DOWNSTREAM from all shut-off valves, regardless of the application.

Designed and manufactured by:

Senninger Irrigation Inc.

6416 Old Winter Garden Road, Orlando, FL 32835 U.S.A. • Telephone: 407-293-5555 • Fax: 407-293-5740

Website: www.senninger.com • e-mail: info@senninger.com

SENNINGER LAWN & GARDEN REGULATOR REGULATION CHART

